


I-315


Apex-i

H.264 (High Profile) Fish-Eye Network Camera

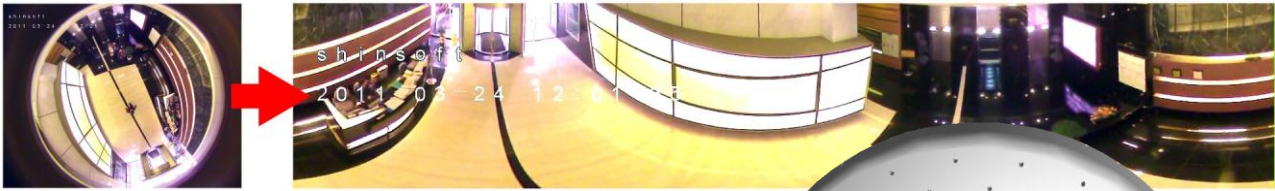

Features

- 360° source view Quad view 3 PTZ with source Broad view
- H.264 2 Megapixel Panorama Network Camera
- Featured with 360° Fish-Eye Lens
- Advanced e-PTZ
- H.264 / MJPEG codec
- Day / Night function with mechanical ICR
- 9 video layouts for ceiling mount, wall mount and table view applications
- Two-way audio support
- Micro SD card for local storage
- e-PTZ Day / Night
- H.264 MJPEG Mobile Device

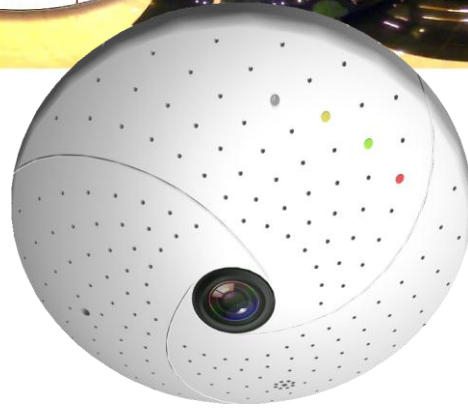

Specifications

Model	I-315
Video Compression	H.264 / Motion JPEG
Video Resolution	2M: 1600x1200
Image Layout	source image, table view (video conference mode)360° double broad view, 360° 3 PTZ views with source, 360° quad view, 360° broad view (Ceiling mount mode) 180° broad view with cropping function, 180° 3 PTZ views with source, 180° 2 PTZ views with broad view. (Wall mount mode)
Bit Rate	2M ~ 6Mbps (CBR/VBR configurable)
Frame Rate	15FPS @ 1600x1200
Image Device	Color CMOS Sensor
Lens Type	Fish-Eye Lens, FOV=185° (D/H/V), F=2.0mm, f=1.25mm
Day/Night function	Mechanical IR cut filter
Video Control	Controllable frame/bit-rate(bandwidth), VBR/CBR control, Backlight compensation
Image Adjustment	Brightness, Saturation, Sharpness, Exposure, White balance control
Event System	Trigger : motion detection Action : file upload via FTP, e-mail and Micro SD card Notification via e-mail
Local storage	Micro SD card (not included) , support SDHC, schedule recording, full over-write
Network Interface	10 BASE-T/100 BASE-TX
PoE	IEEE802.03 af
Wireless	IEEE802.11n (option)
Protocols	HTTP, HTTPS, TCP/IP, IPv4, UDP, SMTP, FTP, DHCP, DDNS, NTP, DNS, ARP, RTSP, RTP, Bonjour,UPnP
Audio Capability	1x line in, 1x line out, built-in microphone
Audio Compression	u-Law PCM 8KHz
Power Supply	AC/DC switching power adapter, Input : AC100~240V, output : DC12V/2A (option)
Security	Password protection, https encryption, user access log
Power Consumption	5W
Operation Temperature	0°C ~ 50°C
Operation Humidity	20%~80% RH
Browser	IE 7.0 above
Certification Report	CE/FCC, ROHS, WEEE
Privacy Mask	Yes (to be firmware upgraded)
Dimension (x H)	180 x 55
Net Weight	380g
I/O Connectors	1x RJ45 10 BASE-T/100 BASE-TX 1x DC jack 1x Audio line out/1x audio line in 1x Default setting button 1x I/O Terminal connector, 4x DI/1x DO
Package Contents	1x CD (User's manual and software) 1x Quick Installation Guide

販売代理店 ディスクテック(株) 電話 053-450-3781 sales@disctech.co.jp

Apex-I International CO., LTD

6F No.5-1, Innovation 1st RD Science-Based industrial Park Hsinchu 30076, Taiwan, R.O.C
TEL : +886-3-668-7070 FAX : +886-3-668-7171